



Ruggli PAD

 **RUGGLI**<sup>®</sup>  
swiss precision



# Ruggli PAD Tampon Machine


Ruggli tampon machines have an excellent reputation around the globe. They fulfill all specific customer expectations with respect to manufacturing efficiency and cost-effectiveness. Thanks to continuous development work, the performance and safety of the **PAD** fulfill the highest demands for the production of applicator tampons.



Cams




Soft roll transfer to press

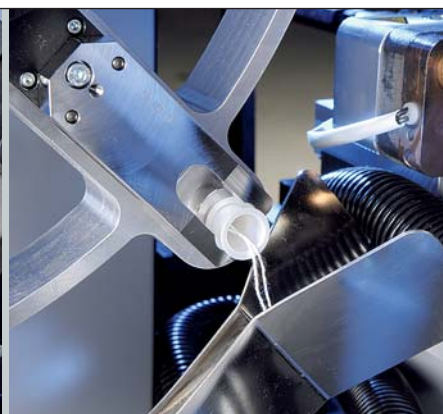

String guide



Detail Spiral conveyer

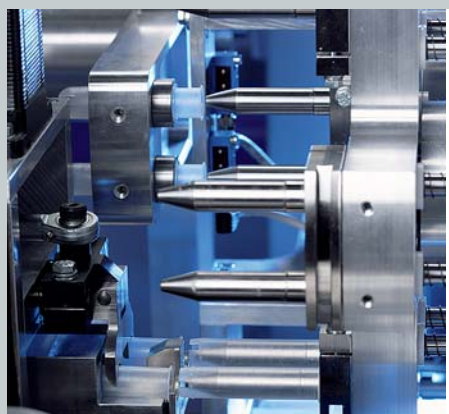

Assembly unit



Output conveyer

## Ruggli PAD

### Output

speed: 85 tampons/min  
efficiency: up to 90%, in relation to operation personnel and material quality

### Dimensions

main unit: LWH: 3600 mm / 1450 mm / 1850 mm  
assembly unit: LWH: 1500 mm / 900 mm / 1850 mm

### Weight

main unit: ca. 4500 kg  
assembly unit: ca. 750 kg

### Main drive

4 kW, frequency controlled, with disc brake

### Electrical power

3 x 400 V AC 50 / 60 Hz, max. 25 A

### Secondary voltage

24 V DC / 60 V DC / 46 V AC / 60 V AC and 230 V AC

### Compressed air supply

pressure 6 bar, flow 0.4 m<sup>3</sup>/min