



Ruggli TC-6i

RUGGLI[®]
swiss precision




Ruggli TC-6i Tampon Machine


Ruggli tampon machines have an excellent reputation around the globe. They fulfill all specific customer expectations with respect to manufacturing efficiency and cost-effectiveness. Thanks to continuous development work, the performance and safety of the **TC-6i** fulfill highest demands in the production of applicator tampons.



Cams

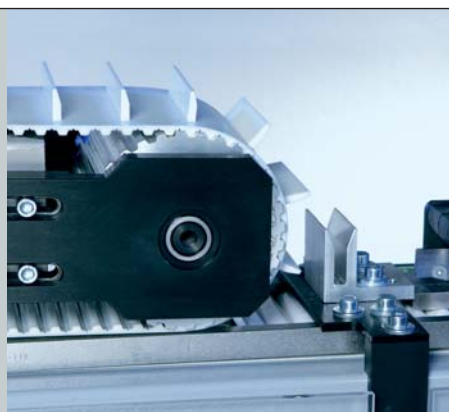


Outer tube conveyer

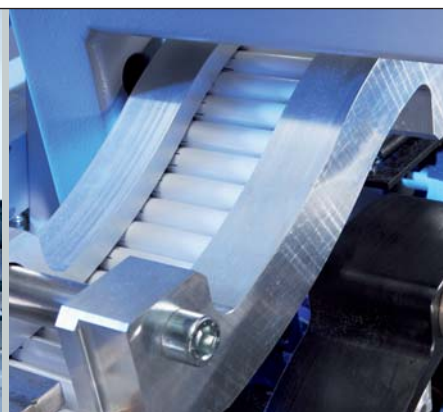

Outer tube guide trail



Axial press

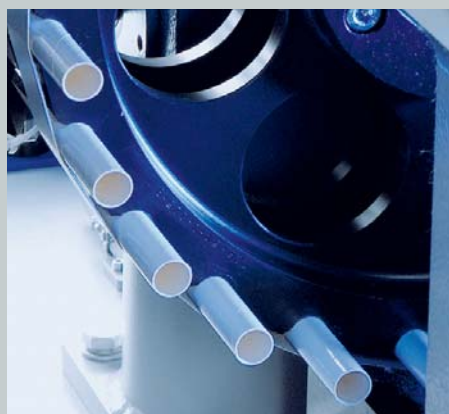

Inner tube drum



Output conveyer

Ruggli TC-6i

Output

speed: 100–130 tampons/min
efficiency: up to 90%, in relation to operation personnel and material quality

Dimensions

main unit: LWH: 4400 mm / 3200 mm / 1850 mm
starunit: LWH: 2500 mm / 1800 mm / 2100 mm

Weight

main unit: ca. 4200 kg
starunit: ca. 2000 kg

Main drive

3 kW, frequency controlled, with disc brake

Electrical power

3 x 400 V AC 50 / 60 Hz, max. 25 A

Secondary voltage

24 V DC / 60 V DC and 46 V AC