
Ruggli_TC-6i_2017_Ruggli_TC6 09.03.17 06:54 Seite 1

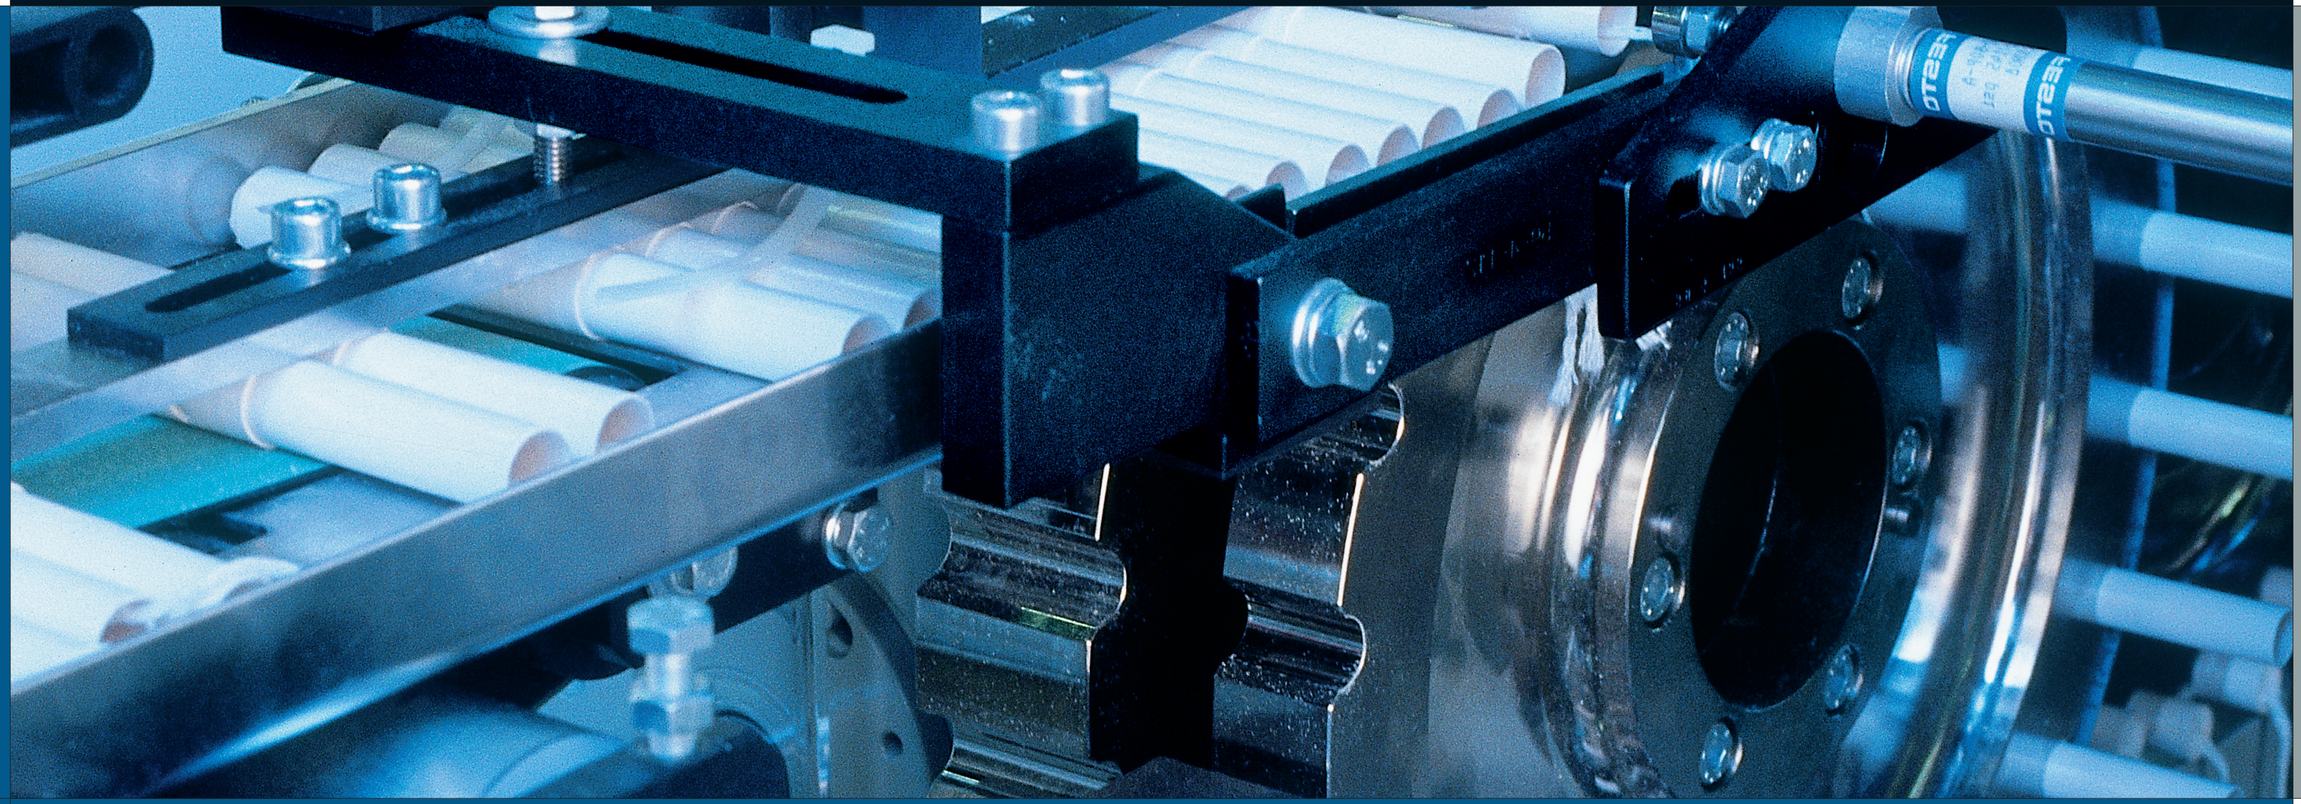

Ruggli TC-6i

ruggli.com

Ruggli AG
Tüfelstrasse 50
5322 Koblenz
Switzerland
Tel. +41 56 267 02 67
Fax +41 56 267 02 68

RUGGLI®
swiss precision




Ruggli_TC-6i_2017_Ruggli_TC6 09.03.17 06:54 Seite 4

Ruggli TC-6i Tampon Machine


RUGGLI®
swiss precision

Ruggli tampon machines have an excellent reputation around the globe. They fulfill all specific customer expectations with respect to manufacturing efficiency and cost-effectiveness. Thanks to continuous development work, the performance and safety of the **TC-6i** fulfill highest demands in the production of applicator tampons.


Die Ruggli Tampon-Maschinen geniessen weltweit einen besonderen Stellenwert. Sie erfüllen bezüglich Produktionsleistung und Wirtschaftlichkeit alle kundenspezifischen Anforderungen. Dank kontinuierlicher Entwicklungsarbeit, erfüllen Leistung und Sicherheit der **TC-6i** höchste Ansprüche zur Herstellung von Applikatoren-Tampons für die Monatshygiene.




Cams
Kurvenscheiben




Outer tube conveyer
Aussenröhrchentransport




Outer tube guide trail
Führungsschiene Aussenröhrchen



Axial press
Axialpresse



Inner tube drum
Innenröhrchen-Trommel



Output conveyer
Auslaufband



Ruggli TC-6i

Ruggli TC-6i	
Output	speed: 100–130 tampons/min efficiency: up to 90%, in relation to operation personnel and material quality
Dimensions	main unit: LWH: 4400 mm / 3200 mm / 1850 mm starunit: LWH: 2500 mm / 1800 mm / 2100 mm
Weight	main unit: ca. 4200 kg starunit: ca. 2000 kg
Main drive	3 kW, frequency controlled, with disc brake
Electrical power	3 x 400 V AC 50 / 60 Hz, max. 25 A
Secondary voltage	24 V DC / 60 V DC and 46 V AC

Ruggli TC-6i	
Produktionsleistung	Geschwindigkeit: 100–130 Tampons/min Effizienz: bis zu 90%, in Abhängigkeit von Bedienungspersonal und Materialqualität
Abmessungen	Haupteinheit: LBH: 4400 mm / 3200 mm / 1850 mm Verformstern: LBH: 2500 mm / 1800 mm / 2100 mm
Gewicht	Haupteinheit: ca. 4200 kg Verformstern: ca. 2000 kg
Hauptantrieb	3 kW, über Frequenzumrichter angesteuert und mit Scheibenbremse versehen
Elektrische Versorgung	3 x 400 V AC 50 / 60 Hz, 25 A abgesichert
Sekundärspannung	24 V DC / 60 V DC und 46 V AC